

Overview


HPE FlexFabric 10Gb 2-port 533FLR-T Adapter

Are you looking to reduce network congestion and improve cable management at the servers in your HPE ProLiant Gen8 and Gen9 environment?

The HPE FlexFabric 10Gb 2-port 533FLR-T Adapter is a dual-port 10GBASE-T adapter, featuring the 57810S 10 Gb Ethernet solution from QLogic in a PCIe 2.0 compliant form factor designed for HPE ProLiant Gen8 and Gen9 rack servers. The HPE 533FLR-T Adapter delivers full line-rate performance across all ports with low power consumption, utilizing CAT 6A UTP cabling with distances up to 100 meters. Providing high performance Ethernet, iSCSI and FCoE connectivity, it is ideal for virtual server and cloud computing environments. It supports enterprise class features such as VLAN tagging, adaptive interrupt coalescing, MSI-X, NIC teaming (bonding), Tunneling offloads (NVGRE, VxLAN), Receive Side Scaling (RSS), jumbo frames, PXE boot) and virtualization features including SR-IOV, Network Partitioning (NPAR), VMware NetQueue and Microsoft VMQ.

For more effective utilization of the 10GbE bandwidth, the HPE 534FLR-SFP+ CNA offers Switch Independent Network Partitioning (NPAR) which enables segmentation of each 10GbE port into four virtual ports, with flexible allocation of bandwidth to each port. Allowing IT organizations to improve resource utilization while lowering infrastructure and operational costs.

The adapter's support for HPE Sea of Sensors 3D Technology enhances server performance by reducing energy consumption and expense.

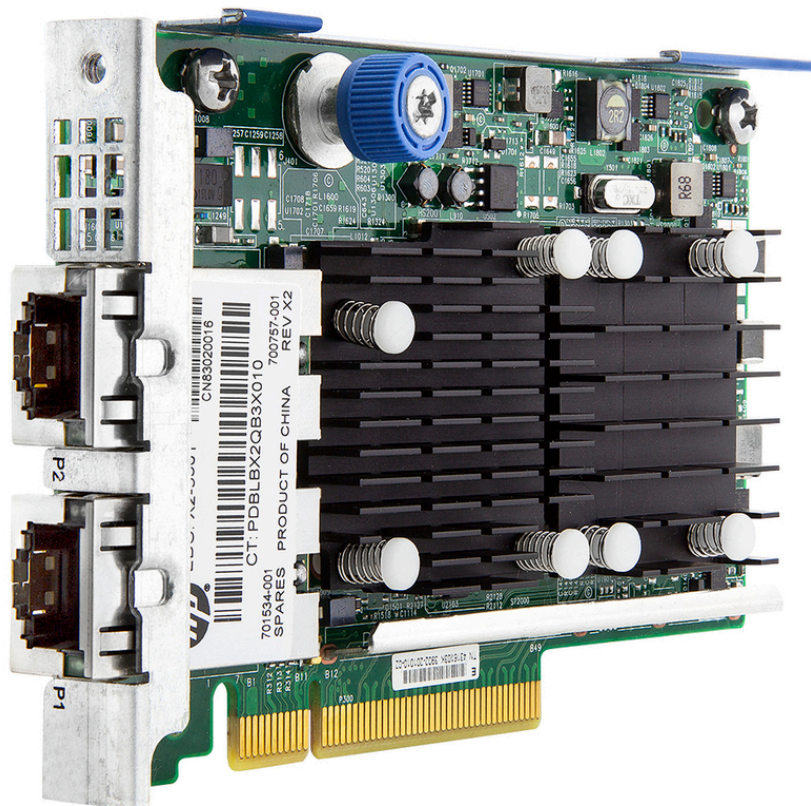

Overview

Models

HP FlexFabric 10Gb 2-port 533FLR-T Adapter

700759-B21

HP FlexFabric 10Gb 2-port 533FLR-T FIO Adapter

700760-B21

Kit Contents

- HPE FlexFabric 10Gb 2-port 533 FLR-T Adapter
- Quick install card
- Product warranty statement

Compatibility

Servers

ProLiant DL (rack-optimized):

- HPE ProLiant DL20 Gen9
- HPE ProLiant DL60 Gen9
- HPE ProLiant DL80 Gen9
- HPE ProLiant DL120 Gen9
- HPE ProLiant DL160 Gen9
- HPE ProLiant DL180 Gen9
- HPE ProLiant DL360 Gen9
- HPE ProLiant DL380 Gen9
- HPE ProLiant DL160 Gen8
- HPE ProLiant DL360p Gen8
- HPE ProLiant DL380p Gen8
- HPE ProLiant DL385p Gen8
- HPE ProLiant DL560 Gen8
- HPE ProLiant DL560 Gen9
- HPE ProLiant DL580 Gen8
- HPE ProLiant DL580 Gen9

ProLiant SL (scalable line):

- HPE ProLiant SL230s Gen8
- HPE ProLiant SL250s Gen8
- HPE ProLiant SL270s Gen8

HPE Apollo System

- HPE ProLiant XL220a Gen8 v2
- HPE ProLiant XL230a Gen9
- HPE ProLiant XL250a Gen9
- HPE ProLiant XL170r Gen9
- HPE ProLiant XL190r Gen9

NOTE: This is a list of supported servers. Some may be discontinued.

Standard Features

Product Features

- Industry-leading throughput and latency performance
- FlexibleLOM adapter
- Operates at 1Gbps/10Gbps, auto-negotiation, on both ports
- 10GBASE-T connectivity supporting up to 100 meters with CAT 6A cabling
- Up to 40Gb/s bi-directional near line rate throughput
- Hardware acceleration TCP/IP/UDP stateless offloads, as well as for TCP Offload Engine (TOE)
- iSCSI and FCoE hardware offloads
- Tunnel offload support (NVGRE, VxLAN)
- Improved small packet performance
- Optimized for virtual server environments with support for Network Partitioning (NPAR) and Single-Root I/O Virtualization (SR-IOV)Active Health Systems support
- PXE, Jumbo Frames, Checksum & Segmentation Offload, IPv6 and RSS
- On chip temperature monitor (Sea of Sensors)
- Field replaceable and upgradeable
- Support for Preboot eXecution Environment (PXE)

Dual-port 10 Gigabit Ethernet Throughput The HPE 533FLR-T adapter delivers 20 Gbps full duplex Ethernet transfer rate per port, providing the network performance needed to improve response times and alleviate bottlenecks that impact performance of next generation data centers. 10Gb Ethernet bandwidth is ideal for high performance computing, database clusters, and more.

Jumbo Frames The HPE 533 FLR-T adapter supports jumbo frames (also known as extended frames), permitting up to a 9K byte (KB) transmission unit (MTU) when running Ethernet I/O traffic. This is over 5X the size of a standard 1500-byte Ethernet frame. With jumbo frames, networks can achieve higher throughput performance and improve CPU utilization. These attributes are particularly useful for database transfer and tape backup operations.

TCP/IP Stateless Offloading TCP, IP, UDP checksum offload, Large Send Offload (LSO), TCP Segmentation Offload (TSO). These features optimize host efficiency, leaving the CPU available for other duties.

The HPE 533 FLR-T Adapter by QLogic offers TCP/IP stateless offloading capability.

Tunnel Offload Minimize the impact of overlay networking on host performance with tunnel offload support for VXLAN and NVGRE. By offloading packet processing to adapters, customers can use overlay networking to increase VM migration flexibility and network scale with minimal impact to performance. HPE Tunnel Offloading increases I/O throughput, reduces CPU utilization, and lowers power consumption. NVGRE tunnel offload supports Microsoft OS environments and VxLAN supports select VMware and Linux (RHEL and SUSE) environments.

iSCSI/FCoE The 533FLR-T supports accelerated iSCSI or iSCSI boot and FCoE for storage connectivity

MSI and MSI-X Message Signaled Interrupt (Extended) provides performance benefits for multi-core servers by load balancing interrupts between CPUs/cores. The HPE 533 FLR-T Adapter by QLogic supports MSI and MSI-X.

Standard Features

802.1Q VLANs IEEE 802.1Q virtual local area network (VLAN) protocol allows each physical port of the HPE 533 FLR-T adapter to be separated into multiple virtual NICs for added network segmentation and enhanced security and performance. VLANs increase security by isolating traffic between users. Limiting the broadcast traffic to within the same VLAN domain also improves performance. The HPE 530T Adapter by QLogic provides support for 802.1Q (VLAN).

TOE TCP/IP Offload Engine (TOE) shifts the processing of data in the TCP protocol stack from the server CPU to the adapter's processor, freeing server CPU cycles for other operations.

Optimized for Virtualization I/O Virtualization support for VMware NetQueue and Microsoft VMQ help meet the performance demands of consolidated virtual workloads.

Compliant with Single-Root I/O Virtualization (SR-IOV), accommodating multiple Virtual Machines (VMs) to share single PCIe resources.

The HPE 533FLR-T Adapter by QLogic is SR-IOV ready, requiring firmware, software and OS support.

Checksum & Segmentation Offload Normally the TCP Checksum is computed by the protocol stack. By selecting one of the "Checksum Offload" parameters, the checksum can be computed by the adapter.

Segmentation Offload is technique for increasing outbound throughput of high-bandwidth network connections by reducing CPU overhead. The technique is also called TCP segmentation offload (TSO) when applied to TCP, or generic segmentation offload (GSO).

The HPE 533 FLR-T Adapter by QLogic has Checksum and Segmentation Offload capabilities.

IPv6 IPv6 uses 128-bit addressing allowing for more devices and users on the Internet. IPv4 supported 32-bit addressing. The HPE 533 FLR-T Adapter by QLogic supports IPv6.

Receive Side Scaling (RSS) RSS resolves the single-processor bottleneck by allowing the receive side network load from a network adapter to be shared across multiple processors. RSS enables packet receive-processing to scale with the number of available processors.

The HPE 533 FLR-T Adapter by QLogic has RSS capabilities.

Time synchronization implementations (PTP) Synchronization of system clocks throughout a network, achieving clock accuracy in the sub-microsecond range, making it suitable for measurement and control systems.

The HPE 533 FLR-T Adapter by QLogic supports Precision Time Protocol-ready (PTP).

Network Adapter Teaming The HPE 533 FLR-T adapter support for NIC teaming helps IT administrators increase network fault tolerance and increased network bandwidth, The team of adapters can work together as a single virtual adapter. The HPE 530T provides support for several different types of teaming enabling IT administrators to optimize

Standard Features

availability, improve performance and help reduce costs.

Network Partitioning (NPAR) The HPE 533FLR-T supports Network Partitioning (NPAR) for ProLiant rack servers. Allowing administrators to configure a 10Gb port as four separate partitions or physical functions. Each PCI function is associated with a different virtual NIC. To the OS and the network, each physical function appears as a separate NIC port.

Network Management

Management Support The HPE 533 FLR-T adapter can be administered from HPE Systems Insight Manager (SIM). The adapters can be managed individually or in teams, providing SNMP based statistics for reporting purposes. The HPE 533 FLR-T adapter can also be managed by other applications with SNMP support.

Server Integration The HPE 533 FLR-T adapter is a validated, tested, and qualified solution that is optimized for HPE ProLiant servers. Hewlett Packard Enterprise validates a wide variety of major operating systems drivers with the full suite of web-based enterprise management utilities including HPE Intelligent Provisioning and HPE Systems Insight Manager that simplify network management.

This approach provides a more robust and reliable networking solution than offerings from other vendors and provides users with a single point of contact for both their servers and their network adapters.

Configuration Utilities Each HPE 533 FLR-T ships with a suite of operating system-tailored configuration utilities that allow the user to enable initial diagnostics and configure adapter teaming. This includes a patented teaming GUI for Microsoft Windows operating systems. Additionally, support for scripted installations of teams in a Microsoft Windows environment allow for unattended OS installations.

LED Indicators The colored LEDs on each port of the HPE 533 FLR-T adapter indicate link status and link activity.

Preboot eXecution Environment (PXE) PXE allows the server to boot over the network and download software residing in the network.

HPE Sea of Sensors 3D Support for HPE's Sea of Sensors which is a collection of 32 sensors that automatically track thermal activity - heat - across the server. When temperatures get too high, sensors can kick on fans and make other adjustments to reduce energy usage. What makes it better is the upgrade from all six fans kicking on at one time to a new system where only one kicks on - the one in proximity of the area that started heating up - thus reducing the amount of energy used for cooling.

VMware NetQueue and Microsoft Virtual Machine Queue (VMQ) VMware NetQueue is technology that significantly improves performance of 10 Gigabit Ethernet network adapters in virtualized environments.

Microsoft Virtual Machine Queue (VMQ) is a feature available on servers running Windows Server 2008 R2 with VMQ-enabled Ethernet adapters. VMQ uses hardware packet filtering to deliver packet data from an external virtual machine network directly to virtual machines, which reduces the overhead of routing packets

Standard Features

and copying them from the management operating system to the virtual machine.

The HPE 530T supports VMware NetQueue and Microsoft Virtual Machine Queue.

Warranty

Maximum: The remaining warranty of the HPE product in which it is installed (to a maximum three-year, limited warranty).

Minimum: One year limited warranty.

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h17007.www1.hp.com/us/en/enterprise/servers/warranty/index.aspx#.V4e3tPkrJhE>

Service and Support

Service and Support HPE Technology Services

HPE Technology Services offers you technical consultants and support expertise to solve your most complex infrastructure problems. We help keep your business running, boost availability, and avoid downtime.

Protect your business beyond warranty with HPE Care Pack Services

When you buy HPE Options, it's also a good time to think about what level of service you may need. HPE Care Pack services provide total care and support expertise with committed response choices designed to meet your IT and business need.

HPE Foundation Care services deliver scalable support-packages for Hewlett Packard Enterprise industry-standard servers and software. You can choose the type and level of service that is most suitable for your business needs. New to this portfolio is HPE Collaborative Support. If you are running business critical environments, Hewlett Packard Enterprise offers Proactive Care or Critical Advantage. These services help you deliver high levels of application availability through proactive service management and advanced technical response.

Here is the support service recommendation from the Foundation Care and Proactive Care portfolio. For customized support service solution, Hewlett Packard Enterprise can work with you to tailor a service solution for your unique support requirements using broader services portfolio of Foundation Care and Proactive Care.

Recommended HPE Care Pack Services for optimal satisfaction with your HPE product

Recommended Services

3-Year HPE 24x7 4 hour Response, Hardware Support Onsite Service

Provides you with rapid remote support and if required a Hewlett Packard Enterprise Authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.

<http://h20566.www2.hp.com/portal/site/hpsc?ac.admitted=1467740454177.125225703.1938120508>

OR

3-Year HPE 24x7 4 hour Response, HPE Collaborative Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution, and basic software problem diagnosis, fault isolation, and resolution if available to Hewlett Packard Enterprise. If the problem is with HPE HW, the representative will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged. In case, the issue is with Hewlett Packard Enterprise or supported third-party software product and cannot be resolved by applying known fixes, Hewlett Packard Enterprise will contact the third-party vendor and create a problem incident on your behalf.

HPE ProLiant Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner

<https://www.hp.com/h20195/v2/GetDocument.aspx?docname=5981-9356EN>

Service and Support

Related HPE Care Pack Services to enhance your HPE product experience

Related Services

3-Year HPE 24x7 4 hour Response, Proactive Care or Critical Advantage
Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

<http://h20566.www2.hp.com/portal/site/hpsc?ac.admitted=1467740454177.125225703.1>

OR

3-Year HPE 6-hour Onsite Call-to-Repair, HPE Collaborative Support

Offers customers a single point of contact for server problem diagnosis, hardware problem resolution to return the hardware in operating condition within 6 hours of the initial service request to the HPE Global Solution Center, and basic software problem diagnosis, fault isolation, and resolution if available to Hewlett Packard Enterprise. In case, the issue is with Hewlett Packard Enterprise or supported third-party software product and cannot be resolved by applying known fixes, Hewlett Packard Enterprise will contact the third-party vendor and create a problem incident on your behalf.

HPE Proactive Select Service

Provides a flexible way to purchase Hewlett Packard Enterprise best-in-class consultancy and technical services. You can buy Proactive Select Service Credits when you purchase your hardware and then use the credits over the next 12 months. <https://www.hp.com/h20195/v2/GetDocument.aspx?docname=4AA3-8855ENW&search=4AA3-8855ENW>

Insight Remote Support

Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more <http://h20564.www2.hp.com/hpsc/doc/public/display?docId=c04844073>

HPE Support Center

Personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers. Learn more <https://www.hp.com/us/en/support.html>
The HPE Support Center Mobile App allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime.

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Care Pack or Hewlett Packard Enterprise contractual support agreement.

NOTE: HPE Support Center Mobile App is subject to local availability.

Parts and materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements. Supplies and consumable parts will not be provided as part of this service; standard warranty terms and conditions apply. Parts and components that have exceeded their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual or the technical product data sheet will not be provided, repaired or replaced as part of this service.

Warranty / Service

For ProLiant servers and storage systems, this service covers HPE-branded hardware options qualified for the

Service and Support

Coverage

server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by Hewlett Packard Enterprise as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.

For more information

To learn more on services for HPE ESSN Options, please contact your Hewlett Packard Enterprise sales representative or Hewlett Packard Enterprise Authorized Channel Partner. Or visit:

<https://www.hpe.com/us/en/servers>

Related Options

Gigabit Server Adapters	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21

10 Gigabit Server Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
HP Ethernet 10Gb 2-port 570SFP+ Adapter	718904-B21

FlexibleLOM Adapters

NOTE: A minimum of two Gigabytes (2 GB) of server memory is required per each adapter.

Ethernet Adapters

HP Ethernet 1Gb 4-port 331FLR Adapter	629135-B21
HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
HP Ethernet 10Gb 2-port 530FLR-SFP+ Adapter	647581-B21
HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
HP Ethernet 10Gb 2-port 561FLR-T Adapter	700699-B21

FlexFabric Adapters

HP FlexFabric 10Gb 2-port 526FLR-SFP+ Adapter	629138-B21
HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700751-B21
HP FlexFabric 10Gb 2-port 554FLR-SFP+ Adapter	629142-B21

Technical Specifications

General Specifications

Network Processor	QLogic 57810S chipset
Data Rate	Two ports, each at 20 Gbps full duplex; 40 Gbps aggregate full duplex theoretical bandwidth.
Bus Type	PCIe v2.0 (Gen 2) x 8
Form Factor	Standard and low profile adapter compliant with the PCIe standard
IEEE Compliance	802.3, 802.3x, 802.2x, 802.3ad, 802.1Qaz, 802.1Qau, 802.1Qbb, 802.1Qbg, 802.1ax
Connector	RJ-45 (Two)
Wiring	CAT6 UTP or better twisted-pair
Cable Distance	Maximum distances for CAT6 cable are 30 meters (98 feet). Maximum distances for CAT6a are 100 meters (328 feet).

NOTE: The HPE 530T adapter can use existing UTP CAT6 (or better) cable to deliver Gigabit Ethernet over copper, according to the IEEE 802.3an specifications. For new installations, CAT6a cable is recommended. Cabling details:

- CAT6 UTP or better twisted-pair
- 22-26 AWG, 100? @ 1 MHz
- EIA/TIA 568-B.2-10b

Power and Environmental Specifications

Operating	Temperature	32° to 131° F (0° to 55° C)
	Humidity	5% to 95% non-condensing
Power	9W maximum	
Agency approvals	USA	FCC Part 15 Class A
	Canada	ICES=003, Issue 4
	Japan	VCCI V3 (2010.04) Class A
	International	EN55022:2006 + A1:2007 Class A, EN55024:1998+A1:2011+A2; EN61000-3-2:2006, EN61000-3-3:2008
	Taiwan	BSMI, CNS13438 (2006) Class A
	Australia/New Zealand (AS/NZS):	EN55022:2006+A12007 class A
	Korea	KN22 Class A, KN24
RoHS Compliance	6 of 6	

Operating System Support

Microsoft:
Microsoft Windows Server 2008 SP2 and R2 w/SP1 (x86 and x64)
Microsoft Windows Server 2012, 2012 R2
Microsoft Windows Hyper-V 2008 R2 w/SP1, 2012, 2012 R2

Linux:

Red Hat Enterprise Linux (RHEL) 5, 6 and 7
SUSE Linux Enterprise Server 11 and 12

Technical Specifications

Solaris:

Solaris 10 and 11

HyperVisors:

VMware ESXi 5.x and 6.x

NOTE: For more Linux OS support & certification information, please visit our the ProLiant & BladeSystem Server Linux matrix:

http://h17007.www1.hp.com/us/en/enterprise/servers/supportmatrix/redhat_linux.aspx#.V4e8tPkrJD8

Environment-friendly Products and Approach**End-of-life Management and Recycling**

Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to:

<http://www.hp.com/info/recycle> To recycle your product, please go to:
<http://www.hp.com/info/recycle>

or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: **<http://www.hp.com/info/recycle>**

These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re-sell Hewlett Packard Enterprise equipment.

Summary of Changes

Date	Version History	Action	Description of Change
22-July-2016	From Version 5 to 6	Changed	QuickSpecs sections were updated and URLs upgraded to hpe.com
08-Apr-2016	From Version 4 to 5	Changed	Overview, Compatibility, Standard Features, and Related Options sections were updated.
		Removed	Obsolete SKUs deleted: 503746-B21
19-Jun-2015	From Version 3 to 4	Removed	Obsolete SKUs deleted: 412648-B21, 435508-B21, 394793-B21, 394791-B21, 458492-B21, 581201-B21.
		Changed	Overview, compatibility, standard features, and technical specifications sections were updated.
28-Nov-2014	From Version 2 to 3	Changed	Changes made throughout the QS.
09-May-2014	From Version 1 to 2	Changed	Changes made throughout the QS.



Sign up for updates



© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.
Windows is a US registered trademark of Microsoft Corporation.

c04111383 – DA – 14616 – WW—v6 – 22-July-2016